


# 5X7 Dot Character VFD Module

# CU209SCPB-T20A

- ❑ 1 line of 20 Characters 9mm High
- ❑ High Speed Parallel/Serial Interface
- ❑ Operating Temp -10°C to +65°C
- ❑ Single 5V Supply
- ❑ High Brightness Blue Green Display
- ❑ ASCII, Katakana & Extended Character Font
- ❑ 8 User Definable Character RAM

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus. The asynchronous serial interface accepts baud rates up to 19,200 with or without parity. Two character font tables can be hardware or software selected. User defined characters and many control commands are available.

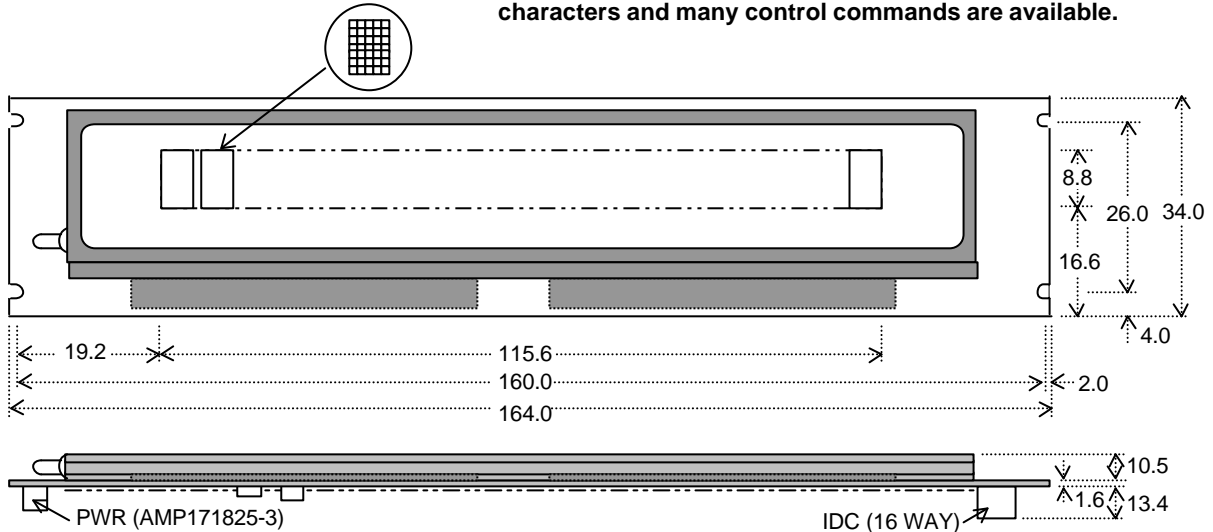

Dimensions in mm & subject to tolerances

## ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	V <sub>CC</sub>	5.0VDC +/- 5%	GND=0V
Power Supply Current	I <sub>CC</sub>	300mADC typ.	V <sub>CC</sub> =5V
Logic High Input	V <sub>IH</sub>	2.0VDC min.	V <sub>CC</sub> =5V
Logic Low Input	V <sub>IL</sub>	0.8VDC max.	V <sub>CC</sub> =5V
Logic High Output	V <sub>OH</sub>	2.4VDC min.	I <sub>OH</sub> = -2.0mA
Logic Low Output	V <sub>OL</sub>	0.5VDC max.	I <sub>OL</sub> = 2.0mA

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x I<sub>CC</sub>.

## OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Character Size/Pitch (XxY mm)	4.45 x 8.8/5.85
Dot Size/Pitch (XxY mm)	0.65 x 1.0/0.95 x 1.3
Luminance	700 cd/m <sup>2</sup> (204 fL) Typ.
Colour of Illumination	Blue-Green (Filter for colours)
Operating Temperature	-10°C to +65°C
Storage Temperature	-40°C to +85°C
Operating Humidity (non condensing)	20 to 80% RH @ 25°C

## SOFTWARE COMMANDS

Instruction	D0-D7	Instruction	D0-D7
Back Space	08H	Katakana Font	19H
Horizontal Tab	09H	Escape	1BH
Line Feed	0AH	>> Send User Font	+43H
Form Feed	0CH	>> Position cursor	+48H
Carriage Return	0DH	>> Software Reset	+49H
Clear Display	0EH	>> Luminance	+4CH
Increment Write Mode	11H	>> Flickerless Write	+53H
Vertical Scroll Mode	12H	>> Cursor Blink Speed	+54H
5x7 Block Cursor On	15H	Character Data	20H+
Cursor Off	16H	User Character Data	00H+
International Font	18H		

## TIMING PARAMETERS (min)

Data Set Up To Write	100ns	Subject to change without notice. Detailed specification on request. IUK Doc Ref:0837 Iss:5 2OCT00
Write Pulse Width	160ns	
Hold After Write	10ns	

## CHARACTER FONTS

	International Font																Additional Katakana Font															
	00	10	20	30	40	50	60	70	80	90	A0	B0	C0	D0	E0	F0	80	90	A0	B0	C0	D0	E0	F0								
00																																
01																																
02																																
03																																
04																																
05																																
06																																
07																																
08																																
09																																
0A																																
0B																																
0C																																
0D																																
0E																																
0F																																

## IDC DATA CONNECTOR

Pin	Sig	Pin	Sig
1	D7	9	WR
2	D6	10	CS
3	D5	11	SIN/TEST
4	D4	12	BUSY
5	D3	13	GND (0V)
6	D2	14	GND (0V)
7	D1	15	V <sub>CC</sub> (5V)
8	D0	16	V <sub>CC</sub> (5V)

## 3 PIN POWER CONNECTOR

Pin	Sig
1	V <sub>CC</sub> (5V)
2	SIN/TEST
3	GND (0V)

Mates with AMP171822-3

## PCB JUMPERS (O)PEN (L)INK

Baud	J2	J1	J0
19200	O	O	O
9600	O	O	L
4800	O	L	O
2400	O	L	L
1200	L	O	O
Parity	J4	J3	
EVEN	O	O	
ODD	O	L	
NONE	L	L/O	

## Noritake Sales Office Tel Nos

Nagoya Japan: +81 (0)52-561-9867  
 Canada: +1-416-291-2946  
 Chicago USA: +1-847-439-9020  
 Munchen (D): +49 (0)89-3214-290  
 Itron UK: +44 (0)1493 601144  
 Rest Europe: +49 (0)61-0520-9220  
[www.noritake-itron.com](http://www.noritake-itron.com)